Air King Ventilation Products®

SPECIFICATIONS

SEV30SSH

RANGE HOODS

Barcelona® Collection, Seville™ Power Unit Insert

500 CFM/11.5 SONES @ 0.10" WG. HVI CERTIFIED 120 Volts, 2.8 amps, 60 hz.

- **Dimensions**
  Overall bottom projection - 10 15/16"
  Height - 10 1/4"
  Width: 31 1/8"
- **Hood Body**
  All metal cold rolled with stainless steel fascia.
- **Motor**
  3 speed, permanently split capacitor motor. Rated 120 volts, 60 hz., 2.8 amps.
- **Lighting**
  Two - Hi spot ES 16, 50 watt maximum halogen lights.
- **Ducting Options**
  Vertical ducting: 6" round duct adapter complete with polymetric back draft damper.
- **Blower Wheel**
  Dual inlet, electronically balanced polymetric centrifugal blower wheel, 5 27/32" width 59 paddles.
- **Cut Out Opening Size**
  Width 30"
  Depth - 10"
- **Filters**
  Three - Model SVGF03, modular aluminum, dishwasher safe grease filters (included).
- **Available Finishes**
  Stainless Steel.

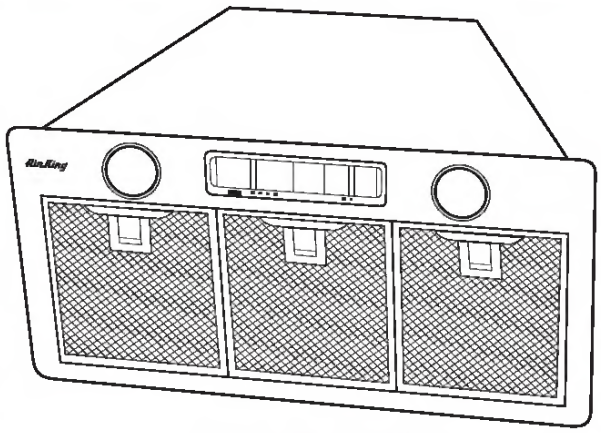

SEV30SS

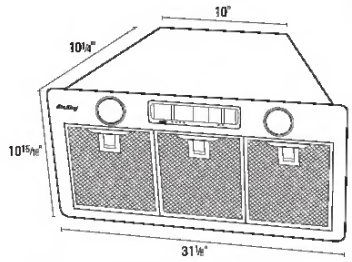

PERFORMANCE

	Static Pressure (inches of w.g.)								*HVI Sones @.1 SP*	*Fan Speed RPM*	*Power Watts*
	0	0.1	0.125	0.25	0.375	0.5	0.75	1.0			
Air Flow - CFM	510	500	497	485	472	459	432	404	11.5	2750	460

PROJECT		**ARCHITECT**	
LOCATION		**ENGINEER**	
CONTRACTOR		**SUBMITTED BY**	**DATE**

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

2100 HVI CERTIFIED™

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 1-07

Downloaded from www.Manualslib.com manuals search engine